


Survey of Section 20 T. 7 R. 1 E

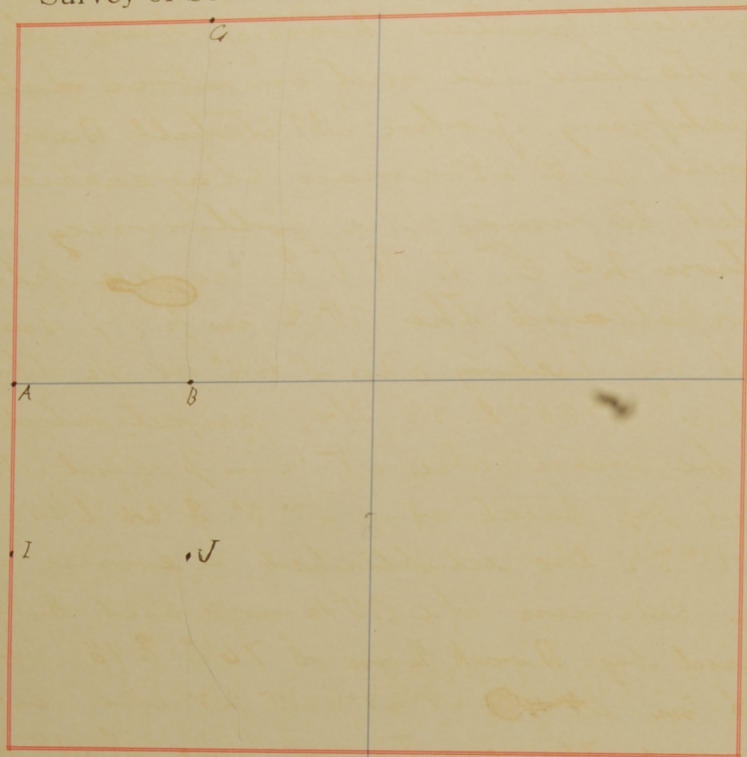

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { Hickory	3	S 44° W	5 1/2				
{ Hickory	4	N 35° E	8 1/2				
G { Beech	14	N 6° E	24				
{ Beech	28	N 86° W	7 1/2				
I { Oak	2	S 76° E	13				
{ Oak	8	N 84° W	28				
J { Hickory	2	N 25 1/2° E	2 1/2				
{ Oak	2	S 15 1/2° W	2				
B { Sandstone		90° E	10				
{ Sandstone		90° W	10				

April 3
1906

All interested parties having been duly notified according to law we met on above date and after qualifying John Mitchell Ben Mitchell chain carriers & I Norman flag carrier we proceeded to make the following survey in section 20 T. 7. R. 1. E. as per plat and notes perpetuated the $W\frac{1}{2}$ m.p. of said section witnessed by Hickory 3 in S. 44° W $5\frac{1}{2}$ lks Hickory 4 in N 36° E $8\frac{1}{2}$ lks, perpetuated the $\frac{1}{2}$ distance between the N. $\frac{1}{2}$ m.p. and N. W corner witnessed by, beech 14 in N 3° E 24 lks beech 28 in N 86° W $7\frac{1}{2}$ lks established a corner at the $\frac{1}{2}$ distance between the $W\frac{1}{2}$ m.p. and S. W. corner witnessed by Oak 2 in S $76\frac{1}{2}^{\circ}$ E 13 lks Oak 8 in ~~N 44°~~ N 48° W 28 lks established a corner at the center of the S W quarter witnessed by Hickory 2 in N $26\frac{1}{2}^{\circ}$ E $2\frac{1}{2}$ lks Oak 2 in S $16\frac{1}{2}^{\circ}$ W 2 lks perpetuated the $\frac{1}{2}$ distance between the center and $W\frac{1}{2}$ m.p. witnessed by sandstone marked W 90° E 20 lks sandstone marked W 90° W 10 lks.

I hereby certify the foregoing to be a true and correct report of the survey made by me on above date as I verily believe. In witness whereof I attach my hand and seal

C. M. Bowers
Deputy